

# Low Pass Filter

## HT-LFCG-530+



50Ω DC to 530 MHz


### Features

- Excellent power handling
- small size
- Low loss
- temperature stable
- LTCC construction , and has good moisture resistance, corrosion resistance, high reliability.


### Applications

- Harmonic Rejection
- VHF/UHF transmitters / receivers
- RF suppression for DC lines on PCB
- Anti-aliasing for A/D converter

### Functional Schematic

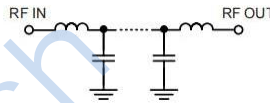

### Typical Frequency Response



Electrical Specifications at 25°C							
Parameter		F#	Frequency(MHz)	Min.	Typ.	Max.	Unit
Pass Band	Insertion Loss	DC-F1	DC-530	-	1.5	1.8	dB
	Freq.Cut-Off	F2	601	-	3.0	-	dB
	Return Loss	DC-F1	DC-530	-	14	-	dB
Stop Band	Rejection Loss	F3-F4	980-2600	30	50	-	dB
		F4-F5	2600-4000	-	40	-	dB

### Maximum Ratings

Operating Temperature	-55°C to 125°C
Storage Temperature	-55°C to 125°C
RF Power Input*	3.5 W max. @25°C


\*Passband rating, derate linearly to 0.6W at 125°C ambient  
Permanent damage may occur if any of these limits are exceeded.

### Pad Connections

INPUT	8
OUTPUT	4
GROUND	1,2,3,5,6,7




### Demo Board P/N: CG-2012 Suggested PCB Layout

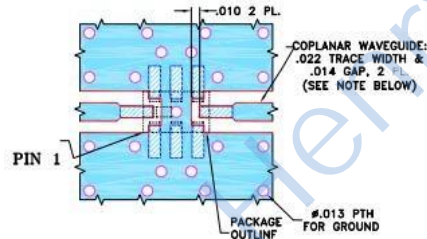

#### NOTES:

1. COPLANAR WAVEGUIDE IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010" ± .001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
  2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

### Outline Drawing

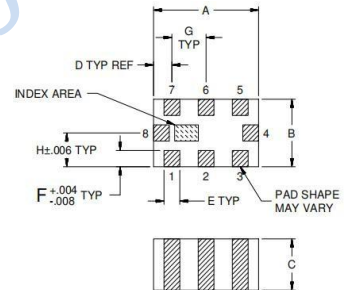

### Outline Dimensions: Unit ( mm )

A	2.00	E	0.30
B	1.25	F	0.30
C	0.95	G	0.65
D	0.35	wt	0.008g

