

Low Pass Filter

Features

- high rejection
- sharp insertion loss roll off
- excellent VSWR, 1.15:1 typ. @ passband
- aqueous washable

Applications

- wireless communications
- receivers / transmitters

HT-RLP-470+



50Ω DC to 470 MHz

Low Pass Filter Electrical Specifications

PASSBAND (MHz) (loss < 2 dB)	f _{co} (MHz) Nom. (loss 3 dB)	STOPBAND (MHz)		VSWR (:1)	
		(loss > 20 dB)	(loss > 40 dB)	Passband Typ.	Stopband Typ.
DC-470	510	650-780	780-2000	1.15	20

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input*	0.5W max.
*Permanent damage may occur if any of these limits are exceeded.	


Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
	\bar{x}	σ			
0.5	0.11	0.02	42.90	2.0	0.83
50.0	0.10	0.01	34.55	5.0	1.15
270.0	0.40	0.01	19.30	10.0	1.35
425.0	0.67	0.01	21.95	40.0	1.33
470.0	0.94	0.03	22.09	80.0	1.32
500.0	2.14	0.15	8.44	100.0	1.33
510.0	3.18	0.22	5.76	140.0	1.40
515.0	3.82	0.26	4.76	160.0	1.41
553.0	11.00	0.42	1.32	200.0	1.45
594.0	19.44	0.42	0.67	220.0	1.51
650.0	29.87	0.42	0.47	250.0	1.54
690.0	36.62	0.44	0.39	270.0	1.59
780.0	49.62	0.73	0.29	320.0	1.74
800.0	52.53	1.16	0.29	360.0	2.02
1000.0	61.01	2.97	0.20	400.0	2.27
1500.0	58.15	3.69	0.26	420.0	2.47
1850.0	57.47	2.55	0.26	470.0	3.35
2000.0	59.38	4.12	0.25	500.0	5.25

Pin Connections

RF IN	2
RF OUT	6
GROUND	1, 3, 4, 5, 7, 8


Outline Drawing

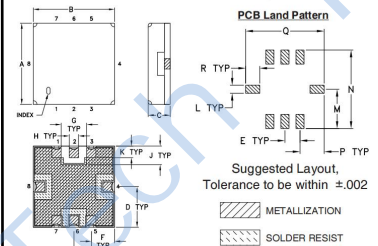




Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.350	.350	.100	.175	.075	.100	.110	.040	.080
8.89	8.89	2.54	4.45	1.91	2.54	2.79	1.02	2.03
K	L	M	N	P	Q	R		wt.
.050	.040	.195	.390	.120	.390	.070		grams
1.27	1.02	4.95	9.91	3.05	9.91	1.78		0.25

Suggested PCB Layout



- NOTES:
1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .025" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

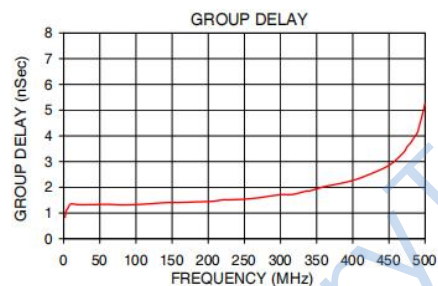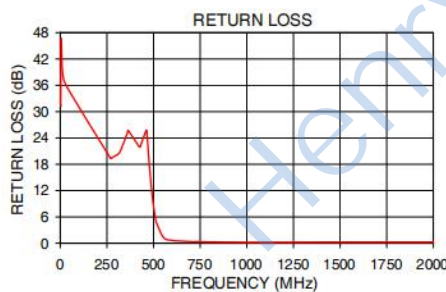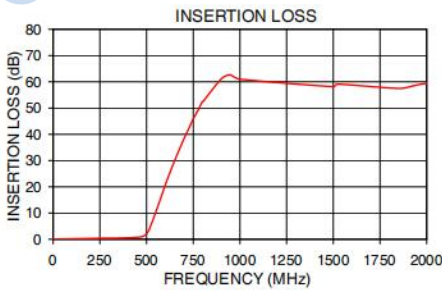

Functional Schematic

