


This document contains proprietary information and such information may not be disclosed to others for any purposes,  
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	01/09/15	01/09/15

1. Electrical
  - 1.1 Impedance: 50ohm
  - 1.2 Frequency: DC-6GHz
  - 1.3. Insulation resistance:  $\geq 5000M\Omega$
  - 1.4 Dielectric withstanding voltage: 500V(rms)
  - 1.5 VSWR: 1.20:1

2 Material&Finish

- 2.1 Inner Contact: Brass, gold plated
- 2.2 Outer Contact: Bronze, gold plated
- 2.3 Insulators: PTFE

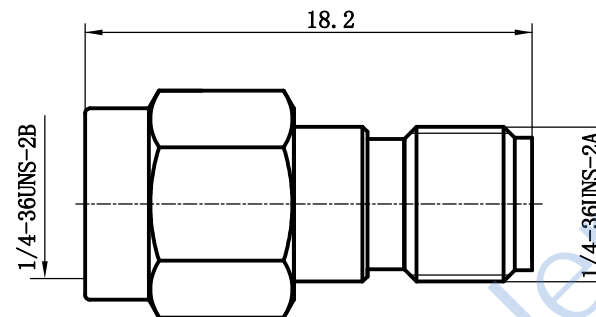

Tel:Lee13890694956

Web:www.henglitaitech.com/cn

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 01/09/15
ENGINEER: L.yu 01/09/15
APPROVED: W.yi 01/09/15
TOLERANCES UNLESS OTHERWISE SPECIFIED
X ±0.50
.X ±0.20
.XX ±0.10
ANGLES ±1°

TITLE:  
RF Adaptor  
SMA Male to Female Adaptor



DIMENSION IN MILLIMETERS (mm)

PART NO: HL-SMA-JKB	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A
---------------------	----------	------------	------------	--------