


HLT-1/30-8BNC

8-Way Power Divider

Specifications

SN	Parameters	Specifications
1	频率范围 Frequency Range	1~30 MHz
2	插入损耗 Insertion Loss	≤ 3.0 dB (Excluding theoretical loss 未含理论损耗 9.0 dB)
3	输入驻波 Input Port VSWR	Typ.1.18 / Max.1.50
4	输出驻波 Output Port VSWR	Typ.1.18 / Max.1.50
5	隔离度 Isolation	Typ.32dB / Min.20dB
6	幅度平衡 Amplitude Balance	± 0.5dB
7	相位平衡 Phase Balance	±3°
8	阻抗 Impedance	50 Ohms
9	端口接头 Input/Output Connectors	BNC-Female
10	承受功率 Power Rating	Splitter 分路器用时 1W; Combiner 合路器用时 0.5W,每路输入不大于 0.065W;
11	工作温度 Operation Temperature	-55°C ~ +85°C
12	表面处理 Surface Finishing	喷砂本导
13	外形尺寸 Outline Dimensions	58*200*22 (mm)
14	重量 Weight	700 (g)

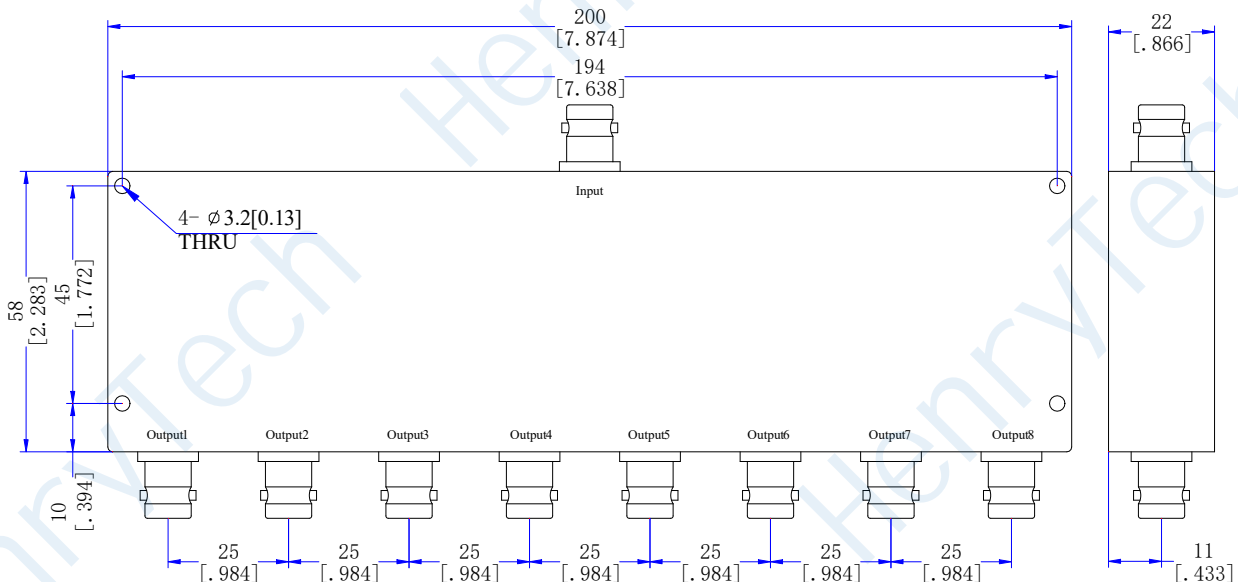

Note: Dimensions (mm / [inch]), General tolerance (±0.3)