


# HLT-20/3000-4S

## 4- Way Resistor Power Divider

### Specifications

SN	Parameters	Specifications
1	频率范围 Frequency Range	20~3000 MHz
2	插入损耗 Insertion Loss	≤ 13.8 dB
3	输入驻波 Input Port VSWR	Typ.1.11 / Max.1.2
4	输出驻波 Output Port VSWR	Typ.1.11 / Max.1.2
5	隔离度 Isolation	Min.11.5dB
6	幅度平衡 Amplitude Balance	± 0.4dB
7	相位平衡 Phase Balance	±4°
8	阻抗 Impedance	50 Ohms
9	端口接头 Input/Output Connectors	SMA-Female 不锈钢
10	承受功率 Power Rating	2W
11	工作温度 Operation Temperature	-35°C ~ +75°C
12	表面处理 Surface Finishing	喷砂本导
13	外形尺寸 Outline Dimensions	40*64*12.5 (mm)
14	重量 Weight	85 (g)

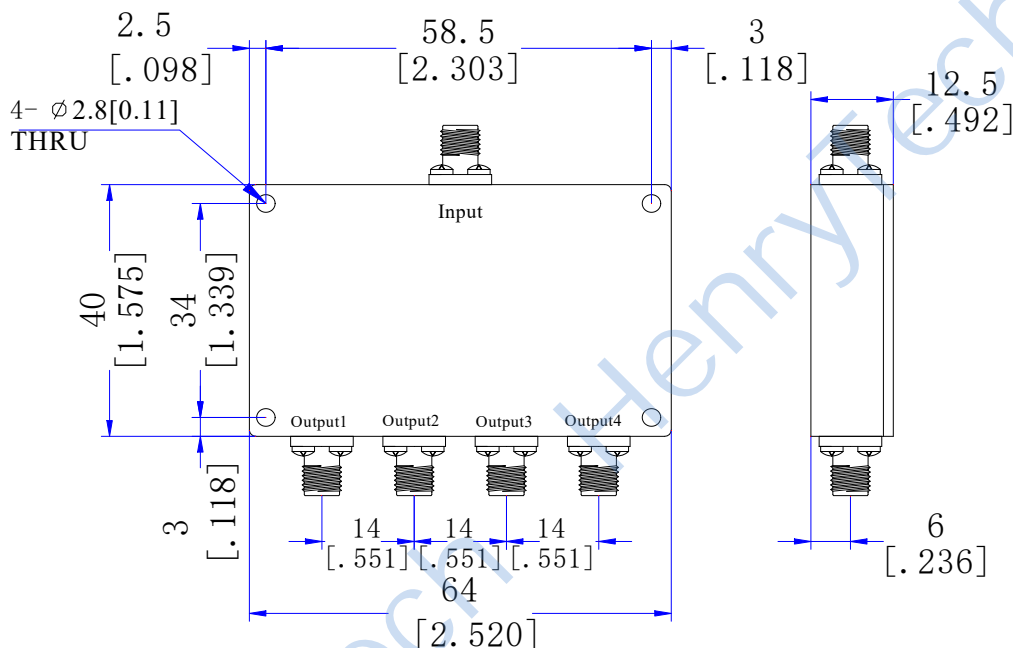

Note: Dimensions (mm / [inch]), General tolerance (±0.3)