


HLT-0.02/6-2N

2-Way Power Divider

Specifications

SN	Parameters	Specifications
1	频率范围 Frequency Range	20~6000 MHz
2	插入损耗 Insertion Loss	≤ 4.5dB (Excluding theoretical loss 未含理论损耗 3.0 dB)
3	输入驻波 Input Port VSWR	≤ 2.0: 1 (20-100M) & 1.50: 1 (100-6000M)
4	输出驻波 Output Port VSWR	≤ 1.5: 1 (20-150M) & 1.20: 1 (150-6000M)
5	隔离度 Isolation	≥ 6dB (20-90M) & 18dB (90-6000M)
6	幅度平衡 Amplitude Balance	±0.3dB
7	相位平衡 Phase Balance	±3°
8	阻抗 Impedance	50 Ohms
9	端口接头 Input/Output Connectors	N-Female
10	承受功率 Power Rating	Splitter 分路器用时 20W; Combiner 合路器用时 2W
11	工作温度 Operation Temperature	-45°C ~ +85°C
12	表面处理 Surface Finishing	Black paint 黑色烤漆
13	外形尺寸 Outline Dimensions	242*44*20 (mm)
14	重量 Weight	(g)

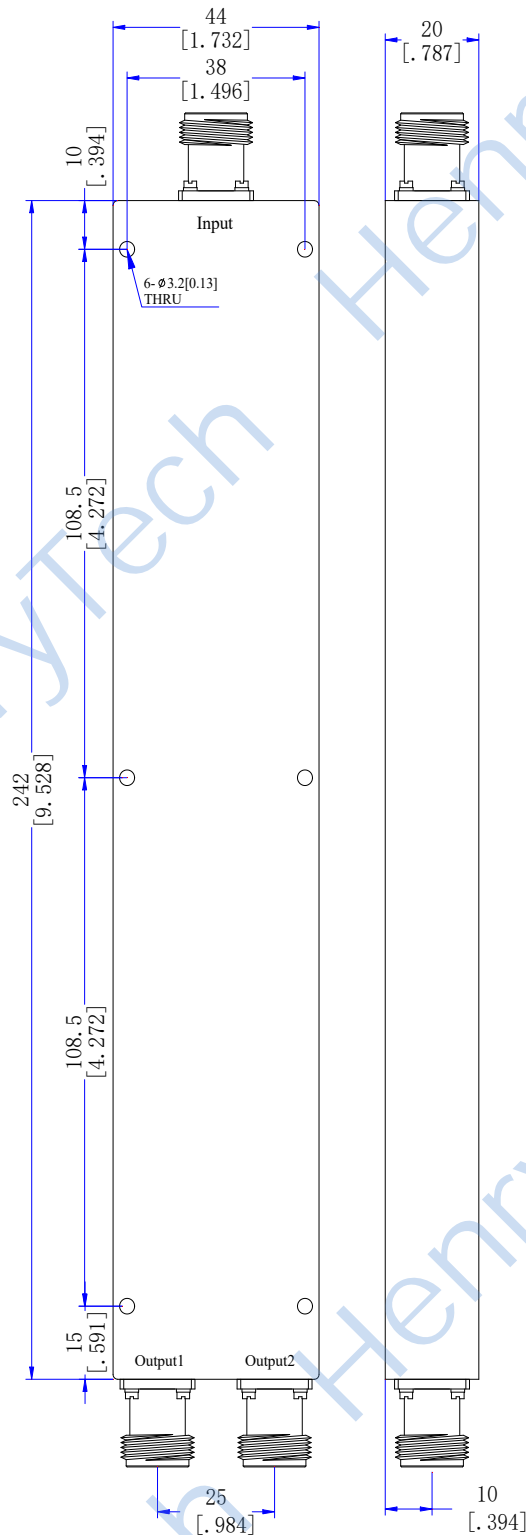

Note: Dimensions (mm / [inch]), General tolerance (± 0.3)