


HLT-20/8500-8S

8- Way Resistor Power Divider

Specifications

SN	Parameters	Specifications
1	频率范围 Frequency Range	20~8500 MHz
2	插入损耗 Insertion Loss	≤ 30dB
3	输入驻波 Input Port VSWR	Typ.1.18 / Max.1.5
4	输出驻波 Output Port VSWR	Typ.1.18 / Max.1.5
5	隔离度 Isolation	Min.6dB
6	幅度平衡 Amplitude Balance	±0.8dB
7	相位平衡 Phase Balance	±8°
8	阻抗 Impedance	50 Ohms
9	端口接头 Input/Output Connectors	SMA-Female
10	功率 Power Rating	2W
11	工作温度 Operation Temperature	-35°C ~ +75°C
12	表面处理 Surface Finishing	Black paint 黑色烤漆
13	外形尺寸 Outline Dimensions	120*60*12 (mm)
14	重量 Weight	220 (g)

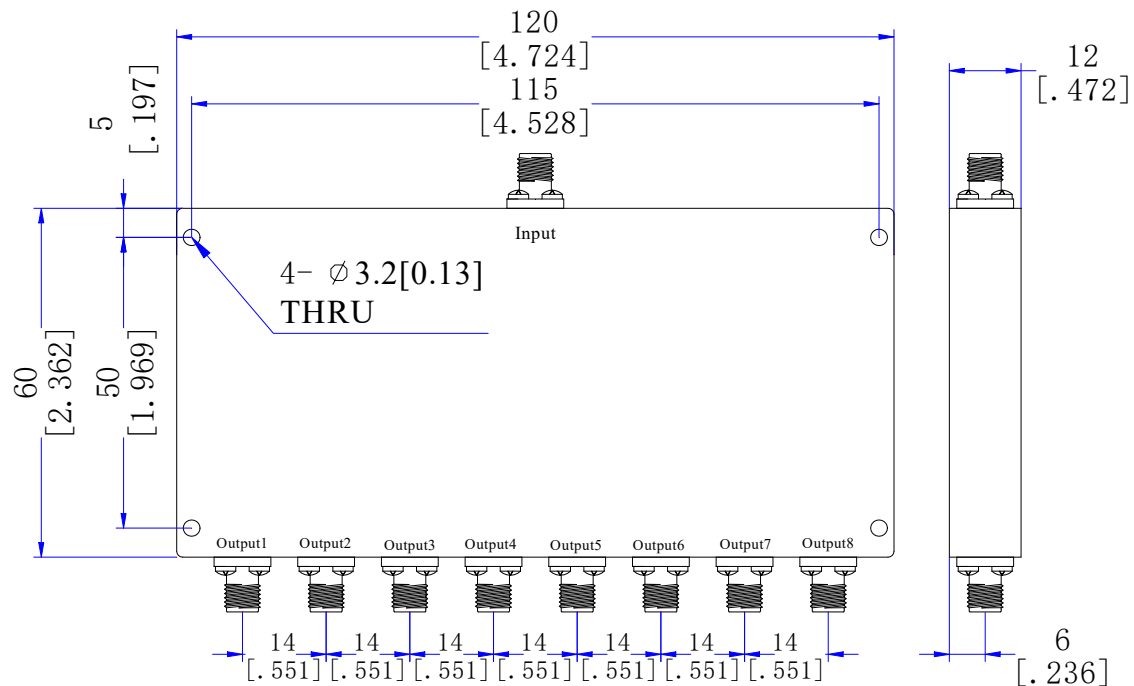

Note: Dimensions (mm / [inch]), General tolerance (±0.3)

Product test curve (产品测试曲线图):

