

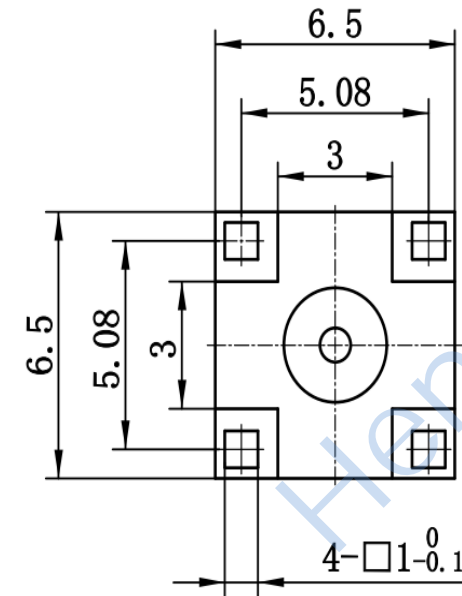


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	19/03/17	19/03/17

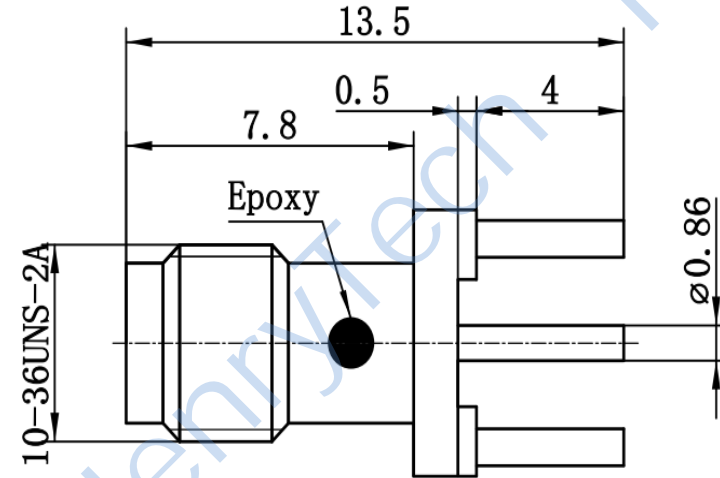

Recommended Mounting Hole

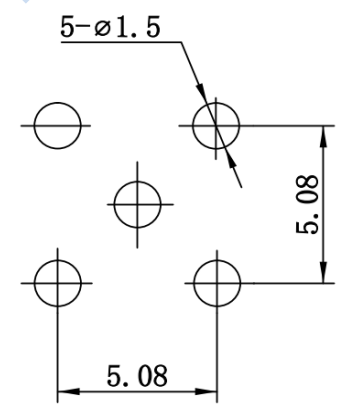

1 Electrical

- 1.1 Impedance 50 Ω
- 1.2 Frequency DC~18GHz
- 1.3 VSWR ≤1.25@6GHz

2 Environmental&Mechanical

- 2.1 Temperature range -40°C~+125°C
- 2.2 RoHs Compliant
- 2.3 Durability >500 cycles

3 Materials&plating


- 3.1 Body: Brass; Gold plated
- 3.2 Insulator: Teflon
- 3.3 Contact Pin: Beryllium-copper, Gold plated


Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17
ENGINEER: L.yu 19/03/17
APPROVED: W.yi 19/03/17
TOLERANCES UNLESS OTHERWISE SPECIFIED
X ±0.50
.X ±0.20
.XX ±0.10
ANGLES ±1°

TITLE:	RF Coaxial Connector SSMA Female Conn. PCB Mount
PART NO:	HL-SSMA-KHD-1



 DIMENSION IN MILLIMETERS (mm)

SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A
----------	------------	------------	--------