


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	19/03/17	19/03/17

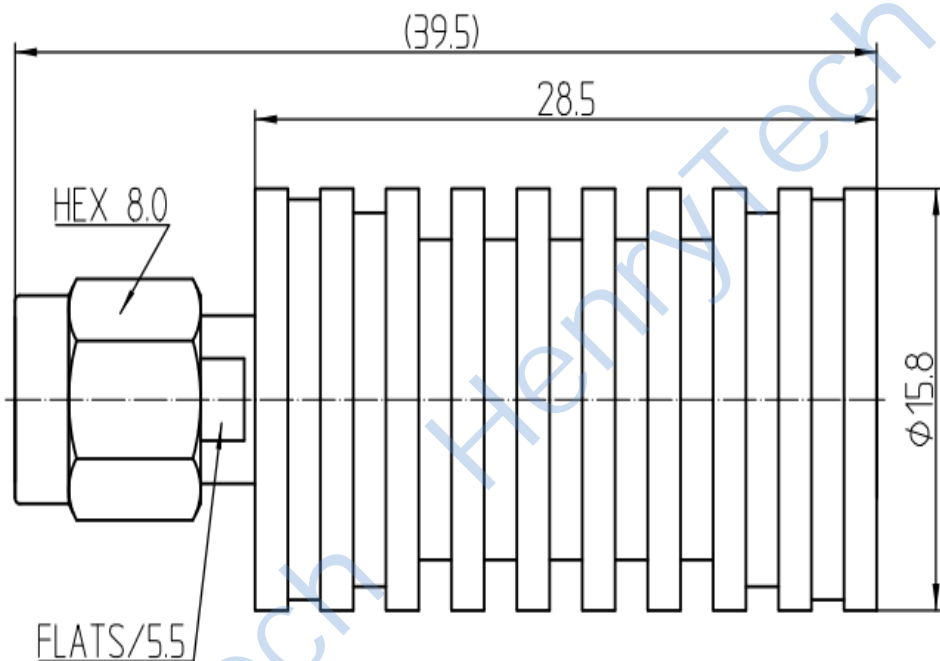

- 1 Electrical
- 1.1 Impedance 50 Ω
 - 1.2 Frequency DC ~6GHz
 - 1.3 VSWR 1.20:1
 - 1.4 Power 10 Watts

- 2 Materials & plating
- 2.1 Body: Stainless Steel Passivated
 - 2.2 Insulator: Teflon
 - 2.3 Contact Pin: Bronze, gold plated
 - 2.4 Coupling Nut: Stainless Steel Passivated
 - 2.5 Outer Contact: Aluminium Oxidation Black



Tel: Lee13890694956
 Web: www.hltchips.com

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17
ENGINEER: L.yu 19/03/17
APPROVED: W.yi 19/03/17
TOLERANCES UNLESS OTHERWISE SPECIFIED
X ±0.50
.X ±0.20
.XX ±0.10
ANGLES ±1°

TITLE:
RF Termination
SMA male Conn.
Termination 10 Watts
PART NO: HL-SMA-50JR-10W

			
 DIMENSION IN MILLIMETERS (mm)			
SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A