


## Features

- low insertion loss, 0.3dB typ. @ passband
- high rejection
- shielded case
- aqueous washable

## Applications

- transmitters / receivers
- sub-harmonic rejection
- military communications

## HT-RHP-225+



50Ω 360 to 3000 MHz


### Electrical Specifications (T<sub>AMB</sub>= 25° C)

STOP BAND (MHz)		FCO,(MHz) Nom.	PASS BAND (MHz)	VSWR (:1)	
(Loss>40dB) (Loss>20dB)		(Loss 3dB)	(Loss < 1dB)	Stopband Typ.	Passband Typ.
DC-125	DC-165	225	360-3000	18	1.2


### Typical Performance Data at 25° C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1.0	85.21	6089.08
10	88.48	2080.62
20	80.68	3438.55
50	76.40	1086.16
100	62.05	216.13
120	50.57	144.10
125	47.99	116.31
150	35.22	68.35
165	27.93	48.25
170	25.58	42.86
200	11.77	14.74
225	3.14	3.04
250	0.96	1.20
360	0.49	1.19
500	0.36	1.21
1000	0.28	1.01
2000	0.40	1.18
3000	0.49	1.15

### Typical Frequency Response

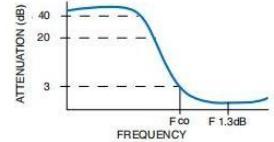

### Functional Schematic

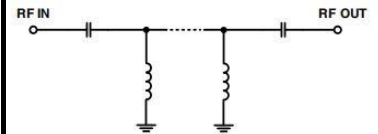

### Pin Connections

INPUT	2
OUTPUT	6
GROUND	1, 3, 4, 5, 7, 8


### Maximum Ratings

Operating Temperature -40°C to 85°C


Storage Temperature -55°C to 100°C

RF Power Input 0.5W at 25°C

Permanent damage may occur if any of these limits are exceeded.

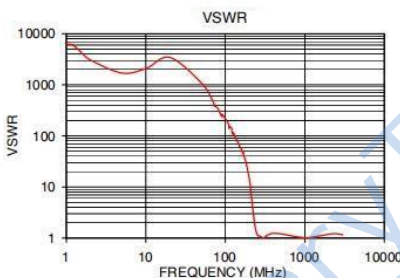

### Demo Board MCL P/N: TB-332 Suggested PCB Layout (PL-176)

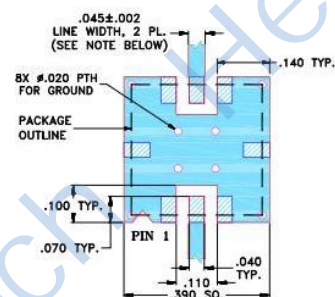


#### NOTES:

1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .025" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Outline Drawing

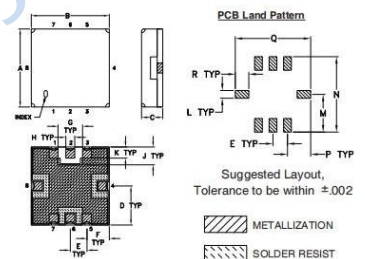

### Outline Dimensions: Unit (mm)

A	8.89	B	8.89	C	2.54
D	4.45	E	1.93	F	2.54
G	2.79	H	1.02	J	2.03
K	1.27	L	1.02	M	4.95
N	9.91	P	3.05	Q	9.91
WT		R	1.78		